



HE SERIES for STANDARD

0.5mm (020)


Structure

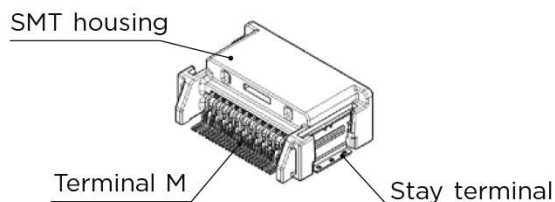

Connector M (PCB)

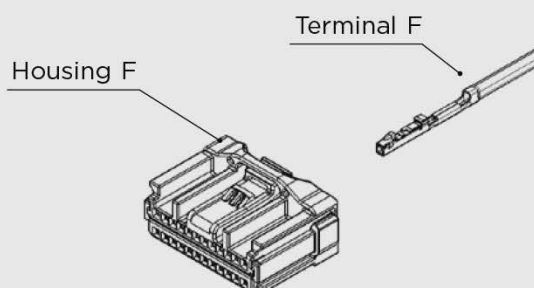


Connector F

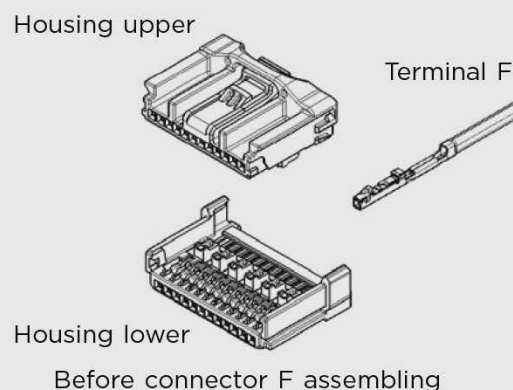

12way


F (6099-0063) Upper



[Reference]
Upper & Lower
Completed model

Color Light Gray

F (6099-0064) Lower



PCB Connector part No.
6099-0003 (C-04)

Color Light Gray

●Applicable Female Terminal 適用フィメールターミナル一覧

	Lock							Lock											
12Way	B	A	A	A	A	B		B	A	A	A	A	A	A	A	A	A	A	B
	B	A	A	A	A	B		B	A	A	A	A	A	A	A	A	A	A	B
24Way																			
42Way	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B
	B	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B

●Applicable Female Terminal for A cavities Aキャビティ適用0.5型端子

サイズ	Alias	適用電線	Applicable Wire	品番	Part.No
SS			CIVUS0.13	8240-0700	
S			CIVUS0.35	8240-0701	

●Applicable Female Terminal for B cavities Bキャビティ適用0.5型端子

サイズ	Alias	適用電線	Applicable Wire	品番	Part.No
SS			CIVUS0.13	8240-0700	
S			CIVUS0.35	8240-0701	
M			CIVUS0.5	8240-0702	

A

B

C





D

E


F

G

H

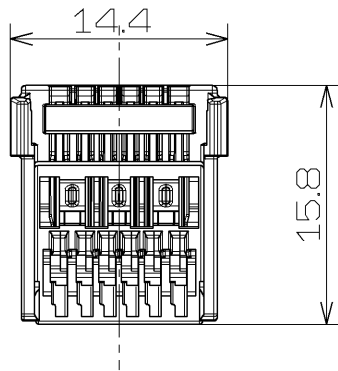

一般公差表 GENERAL TOLERANCES		
以上 OR OVER	未満 LESS THAN	
10	10	±0.3
	50	±0.5
角度 ANGLE		±4°

材 質 MATERIAL PBT		板 厚 THICKNESS		登 録 名 称 PART NAME					
仕 上 FINISH		尺 度 SCALE 2 : 1			HE020-12F-L-LGR				
色 相 COLOR LIGHT GRAY		質 量 MASS 0.5 g		管 理 番 号 REFERENCE No.	S 1 4 4 3 1 3 5				
				部 品 番 号 PART No.	6 0 9 9 - 0 0 6 4				
承 認 APPROVED	検 査 CHECKED	設 計 DESIGNED	製 図 DRAWN	名 称 DESCRIPTION	非防水0.5型12極メスコネクタ(LOWER)				
'22.06.20 N.Kawashima	'22.06.20 T.Tonosaki	2022/06/20 T.SUZUKI	2022/06/20 T.SUZUKI		UNSEALED 0.5TYPE 12WAY FEMALE CONNECTOR(LOWER)				
 三 角 法 THIRD ANGLE PROJECTION				Sumitomo Wiring Systems, Ltd.			A3		